

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number
WO 2004/028767 A1

(51) International Patent Classification⁷: **B28B 11/00**,
11/04, B41F 15/08

(21) International Application Number:
PCT/IT2002/000621

(22) International Filing Date:
30 September 2002 (30.09.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (*for all designated States except US*): **RON-
FLETTE S.A.** [LU/LU]; 17, rue Beaumont, L-2233 Lux-
embourg (LU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **STEFANI, Franco**
[IT/IT]; Via P. Ferrari, 1, I-41049 Sassuolo (IT).


Published:

— with international search report

(74) Agent: **GIANELLI, Alberto**; Bugnion S.p.A., Via Emilia
Est, 25, I-41100 Modena (IT).

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: AN APPARATUS FOR DISTRIBUTING POWDERS ON A SUPPORT IN A PREDETERMINED PATTERN

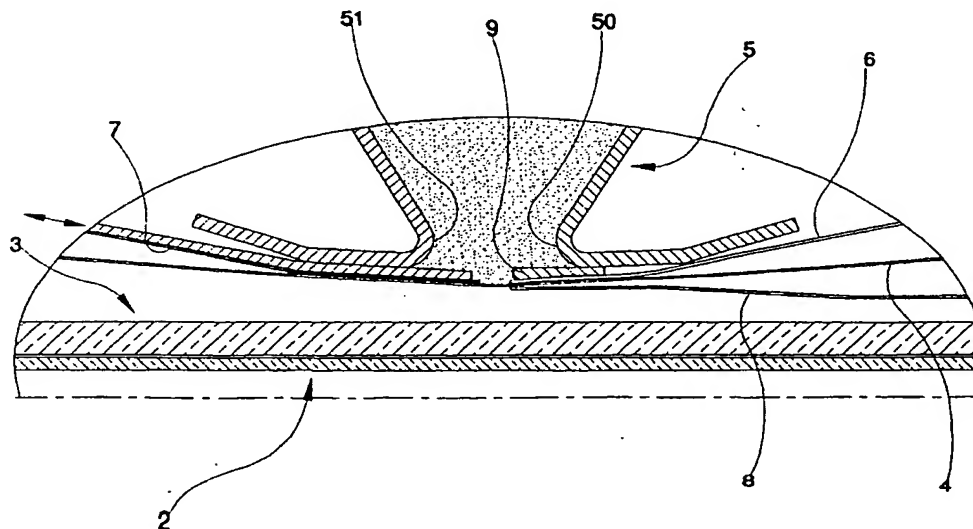

(57) Abstract: The apparatus for distributing powders on a support in a predetermined pattern, comprises: a belt conveyor (2) for transporting the support (3); a head for applying the powders (1), located above the conveyor (2), which head (1) comprises a ring-wound closed continuous belt (4) exhibiting a plurality of perforations arranged according to a predetermined pattern, the perforations being of a size which enables passage of predetermined quantities of powders; means for controlling a supply and delivery of powders through the perforations and for keeping the continuous belt (4) clean. The head also comprises means for controlling a movement of the continuous belt (4) in synchrony with a movement of the conveyor (2).

Description

An Apparatus for Distributing Powders on a Support in a Predetermined Pattern.

Technical Field

The invention relates to an apparatus for distributing powders on a support in a predetermined pattern.

Background Art

Specifically, though not exclusively, the invention is usefully applied in the production of ceramic tiles or slabs.

In particular the invention is usefully applied in a dry-decorating line, i.e. in which powders are laid on supports (tiles or slabs) which have already been formed by a pressing operation, or on supports which are still soft before being subjected to pressing.

Dry decoration using powders is known in flat silk-screening machines, similar to those used with liquid glazes, or in rotary machines which use cylindrical silk screens, also similar to those used with liquid glazes.

These applications exhibits several limitations. In particular, rotary machines using cylindrical silk screens are structurally limited because they do not enable operations beyond certain size limitations (corresponding to the size of the cylindrical screen) inasmuch as the diameter of the screen cannot be increased beyond certain limits.

This problem is overcome, for example, by the invention described in EP publication EP 1162047, which describes an apparatus for distributing powders on a support according to a predetermined design, which comprises: a belt

conveyor for transporting the supports; a head for applying the powders located above the belt conveyor, the head comprising a continuous ring-wound belt exhibiting a plurality of perforations arranged in a predetermined design and of such a size as to allow through only predetermined quantities of powders. The ring-wound holed belt is entirely under tension and is kept clean by the continuous action of pneumatic means using aspiration mouths located in a drum on which the belt is draggily wound. Special distributor organs convey the powders on the internal side of the perforated belt in order to effect the powder distribution on the supports through the perforations present on the belt.

An apparatus of this type exhibits the drawback of subjecting the belt to excessive and dangerous stresses. All of the distributor organs operate on the tensed belt. Also, the belt, while under tension, is forced to drag on the drum at which the cleaning operation is performed by pneumatic aspiration. All of this, plus the highly abrasive properties of the powders, can cause serious drawbacks with regard to the belt and can compromise normal operativity of the apparatus. A further limitation is constituted by the poor precision which the system offers during the guiding of the belt the critical zone where the distributor organs operate.

The present invention proposes to obviate the drawbacks and limitations in the prior art.

An advantage of the present invention is that it is structured so as not to impose any theoretical limitation on the length of the perforated belt.

A further advantage of the invention is that the quantity of powders passing through the perforations and depositing on the underlying supports can be batched in an extremely simple way.

A further advantage of the invention consists in allowing use of quite wide perforated belts so that powders can be distributed with no difficulty on wide

ceramic supports.

These aims and more besides are achieved by the object of the invention as it is characterised by the accompanying claims.

Disclosure of Invention

Further characteristics and advantages of the invention will better emerge from the detailed description that follows, of a preferred but non-limiting embodiment illustrated purely by way of example in the accompanying figures of the drawings, in which:

figure 1 is a schematic front view in vertical elevation;

figure 2 is an enlarged-scale view of a detail of figure 1.

In the figures of the drawings, an apparatus for distributing powders in patterns on supports 3 is schematically illustrated. The apparatus essentially comprises: a belt conveyor 2 for transporting the support 3 and a head 1 for applying the powders on the support as it transits below the head 1, which head 1 is located above the conveyor 2 and comprises a ring-wound closed belt 4 exhibiting a plurality of perforations arranged according to a predetermined pattern, the holes having dimensions which allow passage there-through of predetermined quantities of powders.

The head 1 is provided with means for controlling the supply and/or delivery of powders through the perforations in the belt 4, as well as with means for keeping the belt 4 clean. Also provided are means for controlling the movement of the ring-wound belt 4 in synchrony with the motion of the conveyor 2 on which the supports 3 are transported. The supports 3 can be tiles, slabs, of large dimensions or can be layers of powders still soft and yet to be subjected to press-forming.

The ring-wound belt 4 is of a non-cloth material, and is constant in thickness. Preferably the belt 4 is constituted by a film of Mylar or polycarbonate of the desired length. The belt is closed in a ring by a pressure heat-joint so that the

uniformity of the belt thickness is not disturbed.

The belt can be quite thin and the patterned perforation therein can be made easily by laser incision.

Further, at its sides the belt 4 exhibits slots 40 used for moving the belt 4, which are arranged in longitudinal rows parallel to the longitudinal axis of the belt 4 itself.

During operation the ring-wound closed belt 4 is wound (partially) on a plurality of parallel-axis rollers (10, 11, 12 and 13) which are arranged transversally to the direction of advancement motion of the belt 4 and the conveyor 2.

The roller 10 of the plurality of parallel-axis rollers is a drive roller, which moves the belt 4. For this purpose it is provided with projecting radial pins 14 which fit into the slots 40.

The drive roller 10 is located, with reference to the advancement direction of the belt 4 and the conveyor 2, downstream of the means for controlling the supply and/or the delivery of the powders through the perforations and for keeping the belt 4 clean.

The means for controlling the supply and/or the delivery of the powders through the perforations and for keeping the belt 4 clean comprise a hopper 5 located at a short distance above the belt 4. The powders to be distributed are contained in the hopper 5.

The hopper 5 exhibits an outlet mouth which is located transversally with respect to the advancement direction of the belt 4 and the conveyor 2; the outlet mouth is delimited, perpendicularly to the advancement direction of the belt 4 and conveyor 2, by a front edge 50 and a back edge 51.

A fixed upper doctor 6 is predisposed to operate on the front edge 50 and is pressed against the upper face of the continuous conveyor 4 by an elastic element (a bearing) 9.

There is also a lower fixed doctor 8 which is pressed to operate against the lower face of the belt 4 in order to exert thereon an antagonistic action to the action exerted by the upper fixed doctor 6.

An adjustable doctor 7 is predisposed to operate on the front edge 50 and is pressed against the upper face of the belt 4 and arranged in an opposite direction and as an antagonist against the upper fixed doctor 6.

The position of the adjustable doctor 7 can be regulated as the adjustable doctor 7 is displaceable by translation in a perpendicular direction to the back edge 51 and to the front edge 50 so as to regulate, rather like a trap, the outlet mouth of the hopper 5.

At least the upper fixed doctor 6 and the lower fixed doctor 8 are elastically deformable. They are made of thin sheets, preferably of plastic, and their flexional deformability is exploited in order that they can squeeze the belt 4 between their relative free edges, thus scraping and cleaning the belt 4 on both sides.

The belt 4 is drawn by the drive roller 10 by means of pins which engage in the slots 40.

In this way only the part of belt 4 constituted by the tract comprised between the mouth of the hopper 5 and the drive roller 10 is subjected to tensioning. This enables a correct positioning of the belt 4 with respect to the underlying conveyor 2 and to the supports 3 being carried thereon; also, a minimal stress is placed on the belt 4.

Furthermore, the lower fixed doctor 8 has the important function of preventing powder residues remaining in the tensed part of belt 4 (comprised between the point where the belt 4 is stretched between the free ends of the two fixed doctors 6 and 8 and the drive roller 10) from falling onto the powders which have just been correctly distributed according to a predetermined pattern (by the

-6-

perforations in the belt 4) on the underlying support 3.

The presence of the adjustable doctor 7 which can be regulated by translation in a perpendicular direction to the back edge 51 and the front edge 50 of the outlet mouth of the hopper 5, means that adjustment of the aperture of the mouth of the hopper 5 is very easily done. This means that the quantity of powders deposited by free fall on the underlying support is properly batched.

Claims.

- 1). An apparatus for distributing powders on a support in a predetermined pattern, comprising: a belt conveyor (2) for transporting the support (3); a head for applying the powders (1), located above the conveyor (2), which head (1) comprises a ring-wound closed continuous belt (4) exhibiting a plurality of perforations arranged according to a predetermined pattern, which perforations are of a size which enables passage of predetermined quantities of powders; means for controlling a supply and delivery of powders through the perforations and for keeping the continuous belt (4) clean; means for controlling a movement of the continuous belt (4) in synchrony with a movement of the conveyor (2).
- 2). The apparatus of claim 1, wherein the continuous belt (4) is not made of a textile material and does not present any unevenness in a thickness thereof.
- 3). The apparatus of claim 1 or 2, wherein the continuous belt (4) at sides thereof exhibits slots (40) for drawing, which slots (40) are arranged in longitudinal rows parallel to a longitudinal axis of the continuous belt (4).
- 4). The apparatus of claim 1 or 3, wherein the continuous belt (4) is partially wound on a plurality of rollers (10, 11, 12, 13) having parallel axes which are arranged transversally to an advancement direction of the continuous belt (4) and the conveyor (2).
- 5). The apparatus of claim 4, wherein a roller (10) of the plurality of rollers (10, 11, 12, 13) is a drive roller and draws the continuous belt (4) in motion, and is equipped with radial projecting pins (14) which engage in the slots (40); the drive roller being located downstream, with reference to the advancement direction of the continuous belt (4) and the conveyor (2), of the means for controlling a supply and delivery of powders through the perforations and for

keeping the continuous belt (4) clean.

6). The apparatus of claim 5, wherein the means for controlling a supply and delivery of powders through the perforations and for keeping the continuous belt (4) clean comprise: a hopper (5) located at a short distance above the continuous belt (4); the hopper (5) exhibiting an outlet mouth which is transversally arranged with respect to the advancement direction of the continuous belt (4) and the conveyor (2), and which is delimited, perpendicular to the advancement direction of the continuous belt (4) and the conveyor (2), by a front edge (50) and a back edge (51); a fixed upper doctor (6) which operates at the front edge (50) and which is pressed against an upper face of the continuous belt (4) by an elastic element (9); a fixed lower doctor (8) which is pressed against a lower face of the continuous belt (4) and exerts thereon an antagonistic action to an action exerted by the fixed upper doctor (6); an adjustable doctor (7) which operates at the front edge (51) and is pressed against the upper face of the continuous belt (4) and is arranged opposite to and antagonistically to the fixed upper doctor (6); the adjustable doctor (7) being adjustable by sliding in a perpendicular direction to the back edge (51) and the front edge (50) in order to regulate an aperture of the outlet mouth of the hopper (5).

7). The apparatus of claim 6, wherein at least the fixed upper doctor (7) and the fixed lower doctor (8) are elastically deformable.

ABSTRACT OF THE DISCLOSURE

The apparatus for distributing powders on a support in a predetermined pattern, comprises: a belt conveyor (2) for transporting the support (3); a head for applying the powders (1), located above the conveyor (2), which head (1) comprises a ring-wound closed continuous belt (4) exhibiting a plurality of perforations arranged according to a predetermined pattern, the perforations being of a size which enables passage of predetermined quantities of powders; means for controlling a supply and delivery of powders through the perforations and for keeping the continuous belt (4) clean. The head also comprises means for controlling a movement of the continuous belt (4) in synchrony with a movement of the conveyor (2).


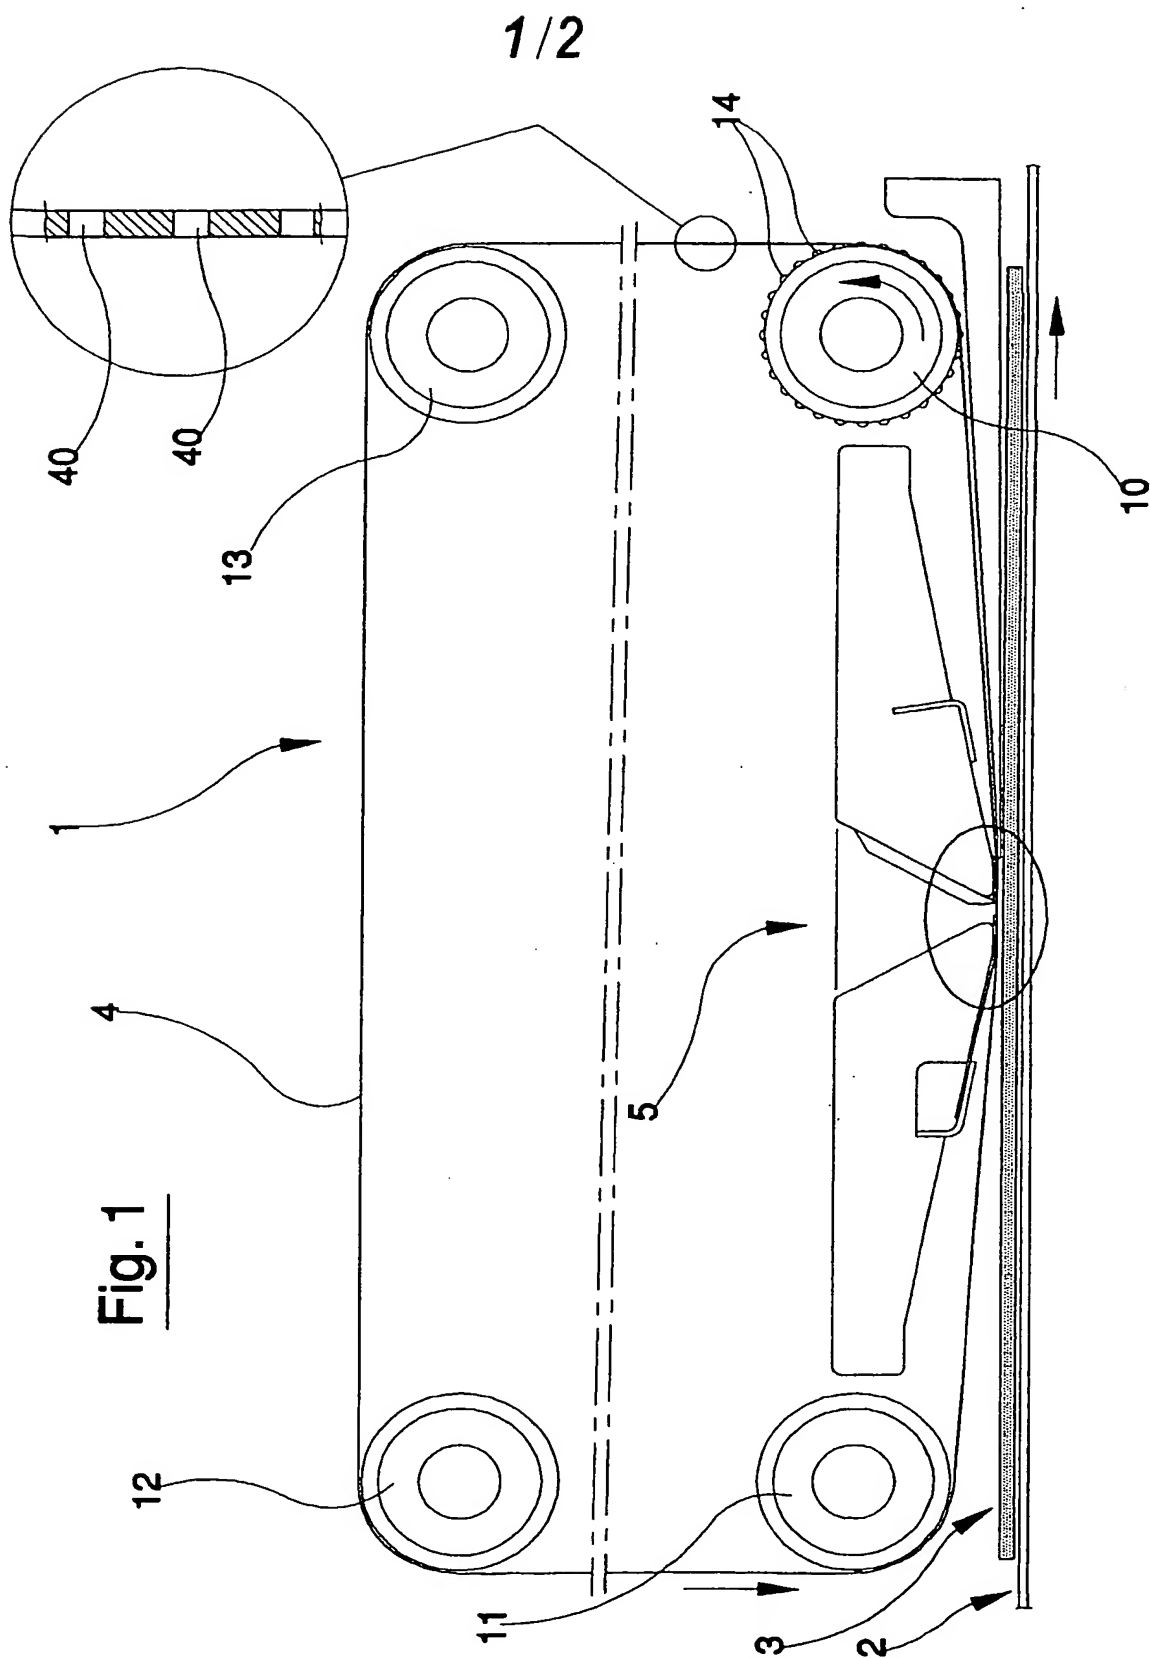


Fig. 1

2/2

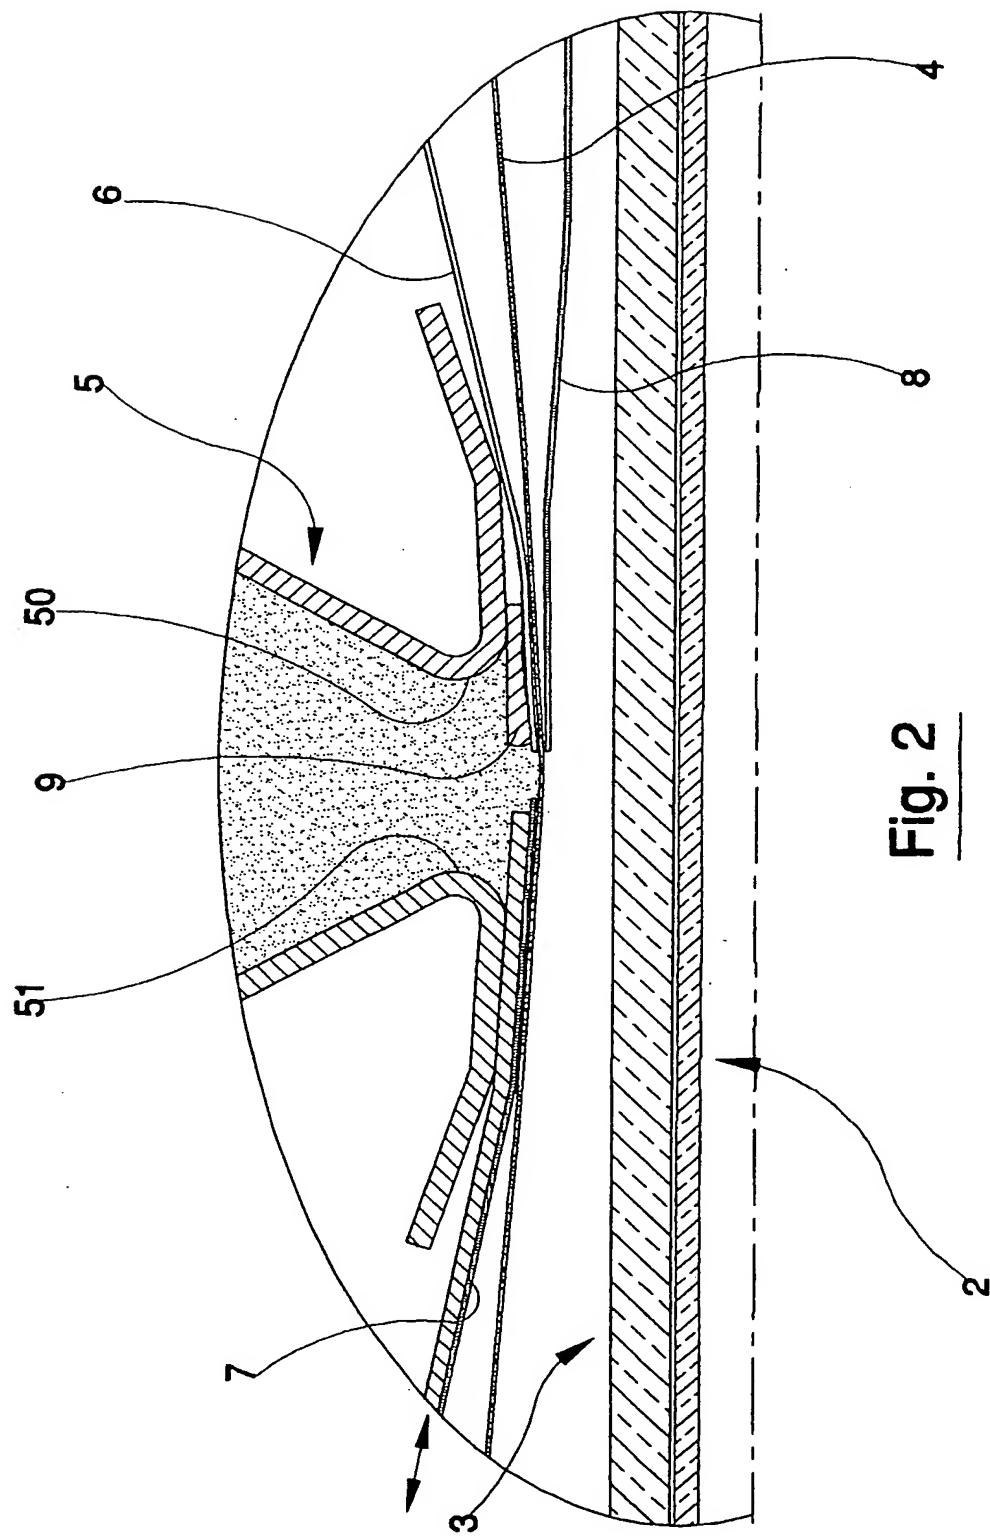

INTERNATIONAL SEARCH REPORT

National Application No

/IT 02/00621

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B28B11/00 B28B11/04 B41F15/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B28B B05C B41M B41F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 162 047 A (RONFLETTE S A) 12 December 2001 (2001-12-12) cited in the application	1, 3-5
Y	the whole document	2
Y	EP 1 063 068 A (TYKE INT L S R L) 27 December 2000 (2000-12-27) column 3, line 17 - line 25	2
A	US 4 753 163 A (BLAAK CORNELIS) 28 June 1988 (1988-06-28) column 4, line 22 - line 27; figure 4	6

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

26 May 2003

Date of mailing of the international search report

03/06/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Or1j, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/IT 02/00621

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1162047	A	12-12-2001	EP 1162047 A1	12-12-2001
EP 1063068	A	27-12-2000	IT PD990132 A1	22-12-2000
			EP 1063068 A2	27-12-2000
US 4753163	A	28-06-1988	NL 8005058 A	01-04-1982
			AT 14696 T	15-08-1985
			DE 3171703 D1	12-09-1985
			EP 0047559 A2	17-03-1982
			JP 1595606 C	27-12-1990
			JP 2020429 B	09-05-1990
			JP 57082048 A	22-05-1982